



Customer

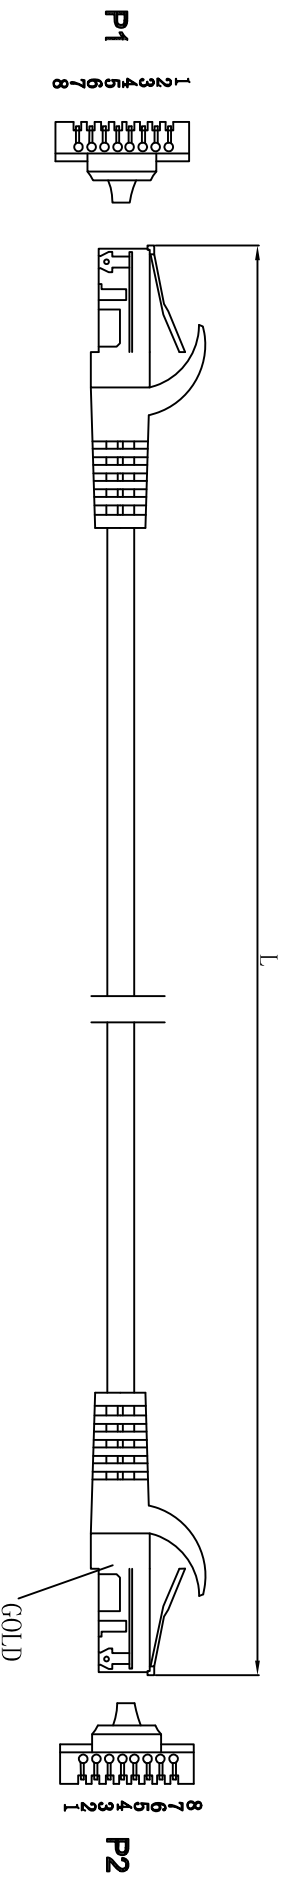

Model	L (m)
6FT	1.83±0.05
10FT	3.05±0.1
15FT	4.57±0.15
20FT	6.10±0.2
25FT	7.62±0.2
30FT	9.14±0.3
50FT	15.24±0.3
75FT	22.86±0.3
100FT	30.48±0.4
200FT	60.96±0.5

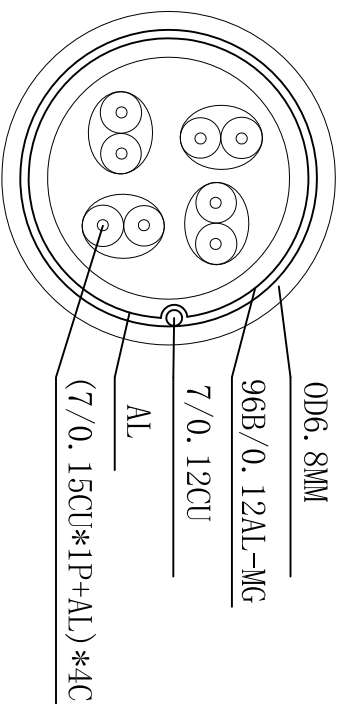

NOTE:

1. CABLE: (7/0.15CU*1P+AL)*4C+AL+7/0.12CU+96B/0.12AL-MG+OD6.8MM PVC JACKET.
2. CONNECTORS: 8P8C SHELL PLUG*1PCS, GOLD PLATED
3. MOLD ASSEMBLY GREEN COLOR
3. OPEN/SHORT TEST: 100% TEST.
4. Operational Temperature Range: -40 to +85°
5. UV resistance

P1	P2
Pin1	Pin1
Pin2	Pin2
Pin3	Pin3
Pin6	Pin6
Pin4	Pin4
Pin5	Pin5
Pin7	Pin7
Pin8	Pin8
SHELL	SHELL
	WHT/ORG
	ORG
	WHT/GRN
	GRN
	BLUE
	WHT/BLUE
	WHT/BRN
	BROWN

Mark	Qty	Change content	signatory	Date	Product name	CAT7 CABLE	Material	Colour	Unit	View
Design			Technology		Model				mm	
Check			Standardization		Drawing No					
Approve			Date							